

Xvision™

CCTV



Model: **X5/8LCD**
Professional 5/8" LCD CCTV
Monitor with 3D Noise Filter

Before you begin

- Please unpack the box carefully and identify that all the parts are present.


Please bear in mind the following points when choosing a mounting position.

- Do not expose the display to humidity, dust, direct sunlight or to extreme weather conditions.
 - Do not use thinner or other chemical detergents when cleaning. Use a soft cloth to remove dust or dirt from the display screen.
 - Avoid storage and use of this display in areas of extreme hot or cold. The display's operating temperature range is -10°C to +40°C.
 - Do not drop or strike the display.
 - For your own safety, when the display is not in use, remove the AC adapter from the mains.
-
- Do not cut the LCD cables, this will void the warranty.
 - Make sure you use only the recommended power supply. Damage caused to the LCD by incorrect voltage or wiring is not covered by the warranty.

Model:
X5/8LCD
Professional 5/8" LCD CCTV Monitor with 3D Noise Filter

Thank you for purchasing this Xvision monitor. Before operating this product, please read this instruction manual carefully.

1. Safety Precautions



CAUTION

RISK OF ELECTRIC SHOCK.
DO NOT OPEN!



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT OPEN COVERS.
NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED
SERVICE PERSONNEL.

- Make sure that you use only the recommended power supply supplied with the unit.
- When installing the monitor, please make sure that you observe the necessary safety precautions.
- Try to avoid all direct contact with the LCD screen as any scratches or marks left on the surface could affect the image quality.


2. Product Features

- Professional 5"/ 8" LCD Colour Monitor for excellent quality 640x480 and 800x600 resolution images respectively.
- High Brightness design for vibrant colours, excellent contrast and brightness response.
- Specially designed for CCTV use.
- Features 2 Phono inputs for 2 different devices.
- Includes VGA input (X8LCD only).
- Compact and robust design ideal for use inside vehicles.
- Can be Wall or Desk mounted.
- Supplied with Remote Control for ease of use.
- Powered by a 12V DC Power Supply (supplied).


3. Contents



X5/8LCD Monitor with Bracket





Remote Control

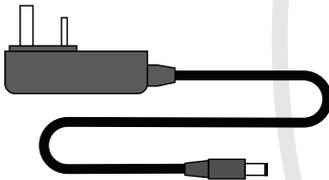

Mains Power Adaptor

4. Connections

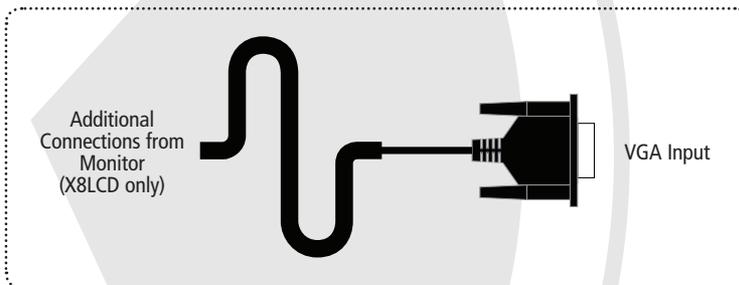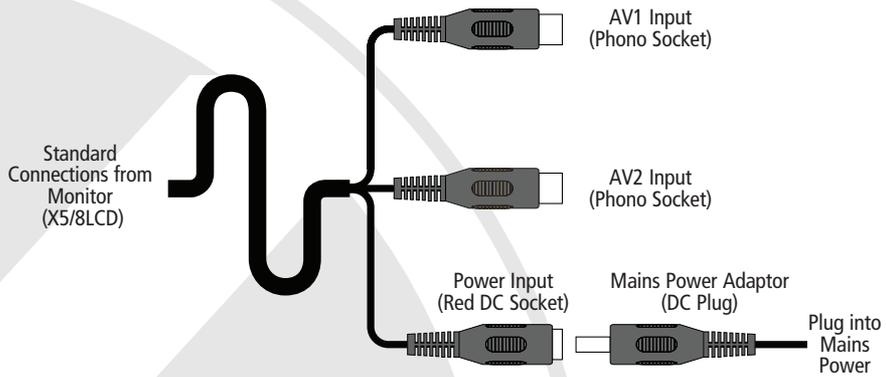


5. Controls



Top of Monitor

1. Power (Switches monitor ON/OFF)
2. - Button (decreases value/setting in Menu mode)
3. Menu Button (Press to enter Menu mode)
4. + Button (increase value/setting in Menu mode)

6. Remote Control

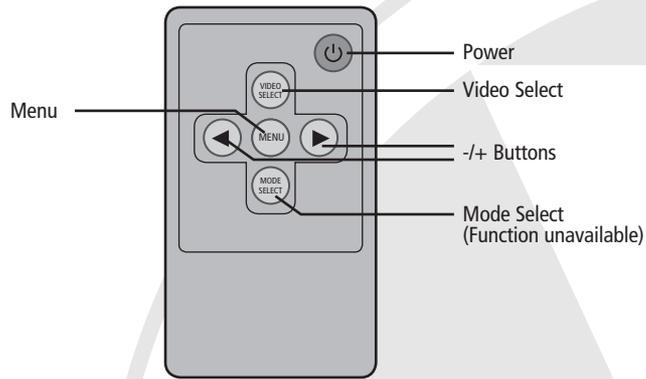

NOTE: Remember to remove the plastic sheet located at the bottom of the remote control before use.

1. Aim the remote control at the infra-red receiver on the front of the LCD.
2. Avoid pressing, dropping, moistening or disassembling the unit.
3. Avoid pressing remote control buttons continuously and quickly. The interval time between operations, allow at least 2 seconds for the remote control to function correctly.

REMOTE CONTROL FUNCTIONS

POWER - Press this button to turn the monitor ON and OFF

MENU - Press this button to enter the Menu mode

◀ ▶ Buttons - Press these to decrease/increase the numerical values when in Menu mode. Use the buttons to also adjust the volume.

VIDEO SELECT: Press this button to switch between AV1 and AV2

MODE SELECT: Function unavailable

7. OSD Menu

In AV mode, press the MENU button to enter Menu mode and then to select the menu category you wish to adjust. Use the ◀ and ▶ buttons on the remote control or the -/+ buttons on the monitor to make any adjustments to the following:

BRIGHTNESS - Adjustment range: 0-100.

CONTRAST - Adjustment range: 0-100.

SATURATION - Adjustment range: 0-100.

HUE - Adjustment range: 0-100.

ROTATION LR - ON/OFF. When ON is selected, use the ◀ and ▶ buttons to make the image rotate to the Left or Right.

ROTATION UD - ON/OFF. When ON is selected, use the ◀ and ▶ buttons to make the image flip 180° Up or Down.

RESET - Press this button to revert the monitor to the original factory settings.

Press the MENU button once you have finished making adjustments to exit Menu mode.

8. Troubleshooting

SYMPTOM	POSSIBLE CAUSE
Monitor does not turn ON	<ol style="list-style-type: none">1. Make sure the power adapter is plugged in correctly2. Make sure the power switch is switched ON
Video input does not work	<ol style="list-style-type: none">1. Make sure the AV (or VGA, X8LCD only) cable is connected properly2. Make sure the AV mode is activated
The remote control does not work	<ol style="list-style-type: none">1. Battery power is low

9. Specifications

Model:	X5LCD	X8LCD
Screen Type:	Professional LCD	
Screen Size:	5"	8"
Resolution:	640x480	800x600
Audio:	Yes	
AV Inputs:	2x Phono Socket	
VGA Input:	No	Yes
Remote Control:	Yes	
Power Requirements:	12V DC, 2000mA	
Power Consumption:	< 10W	< 20W
Suggested Power Supply:	Main powered, Supplied	
Mounting:	Wall or Desk Standing	
Dimensions without bracket (WxHxD):	150 x 120 x 28mm	205 x 173 x 29mm



CCTV

TECHNICAL SUPPORT:

For Technical Support for any Xvision product please contact your local distributor.

LIMITED WARRANTY:

This product is supplied with a 2 Year warranty. The Warranty excludes products that have been misused, (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.

Manufactured exclusively for Xvision - www.x-vision.co.uk



UK/Europe

Xvision Group (UK)
Unit 2, Valley Point,
Beddington Farm Road,
Croydon, Surrey CR0 4WP
Email: sales@x-vision.co.uk

Far East

Kyoung Am Building
157-27 Samsung-dong
Kangnam-ku
135 090 Seoul, Korea
Email: globalsales@x-vision.co.uk

Middle East

Burjuman Tower, 18th Floor
PO Box 121828
Dubai 43659
United Arab Emirates
Email: mesales@x-vision.co.uk

North America

100 Park Avenue
New York City,
New York 10017
United States
Email: usasales@x-vision.co.uk