

Replacing fuses in the Smart Witness SVC100/SVC400 units


This guide will show you how to replace the fuse in the SVC100/SVC400 units

1. Please make sure the unit is **not** connected to a power source before proceeding. Locate the red cable with the fuse enclosure (pictured below).




- SVC100GPS-OEM fuse rating: 250V 1A
- SVC400GPS fuse rating: 250V 3A

2. Secure index fingers above the 2 side notches at a resting position and place both thumbs under the middle clip as shown below.

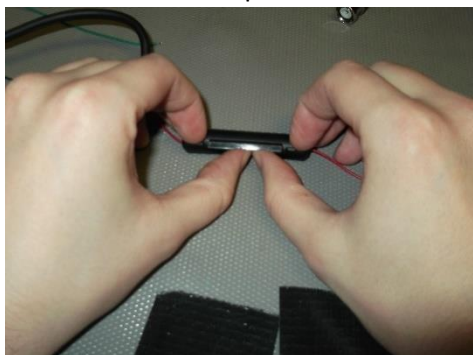

3. Push the clip forward with both thumbs while pushing down with both index fingers. The fuse enclosure will open as shown below.

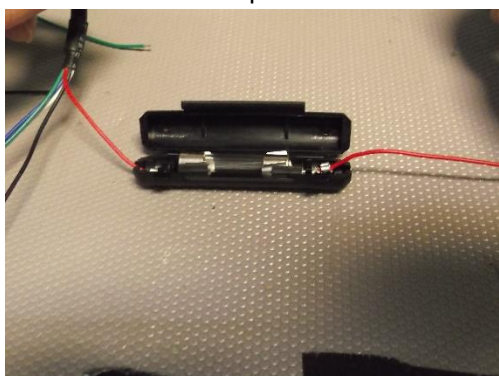

4. Take the fuse out of the enclosure and replace it with a new one, close the enclosure, this will make a click to confirm it's been shut correctly.
5. Fuses can be purchased directly from Smartwitness.

The above procedure should only be attempted by a competent qualified person/technician, and Smart Witness accept no responsibility or liability relating to this. If you require any further technical assistance we can be contacted on 0871 222 1430