

TECHNICAL SUPPORT:


For Technical Support for any Xvision product please contact your local distributor.

LIMITED WARRANTY:

This product is supplied with a 1 Year warranty. The Warranty excludes products that have been misused, (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.



Manufactured exclusively for:
Xvision (Europe) Group,
Head Office: London, U.K.
Email: info@x-vision.co.uk
Web: www.x-vision.co.uk

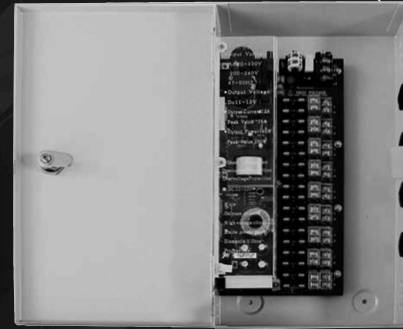

Model: TP1212000
12 Amp, 18 Way Distribution Box

Before you begin


- Use a suitably rated plug and lead according to the input power specification, and ensure a proper connection to Earth at all times.
- Ensure the AC Input power is off before working with the unit.
- The Unit will supply a constant voltage to all Output contacts as specified. Each Output is protected with a fast blow fuse. The fuse will blow open circuit if the current rating is exceeded and the remainder Outputs will be unaffected.
- The unit is protected against reverse polarity and fuse fault. Should the common supplied output be short circuited, the unit will drop the voltage until the fault is corrected. It will immediately reset the voltage when the fault is removed. The same applies when exceeding the Current specification.

Model:
TP1212000
12 Amp, 18 Way Distribution Box

Features

- 18 Individually fuse-protected Outputs rated 1 Amp each
- Output current-limiting and Over-voltage protection

Package Contents



TP1212000 Distribution Box



Keys

Assembly



Side

The rubber can be taken out for the PVC to go through it.




Bottom

To install

To fix up

Wiring

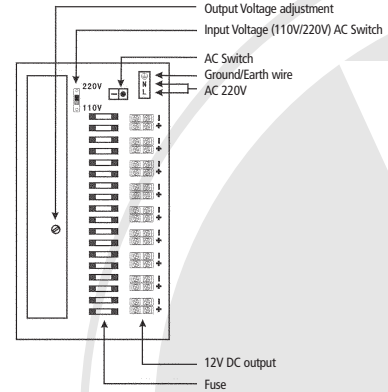

Specification

Model:

TP1212000

Input Power:

90-240V AC @ 47~60Hz

Output Power:

12V DC $\pm 10\%$

Output Current:

12 Amp (145 Watts)

Output Current (Max):

16 Amp (145 Watts) Maximum

Mounting:

Wall

Weatherproofing:

Yes

Dimensions:

317x180x66mm