

TECHNICAL SUPPORT:

For Technical Support for any x-vision product please contact your local distributor.

LIMITED WARRANTY:

This product is supplied with a 1 Year warranty. The Warranty excludes products that have been misused, (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.



Manufactured exclusively for:
x-vision (Europe) Group,
Head Office: London, U.K.
Email: info@x-vision.co.uk
Web: www.x-vision.co.uk



Model: VIS125C
Colour Internal Mini
Camera and Cable

Before you begin

- Please unpack the box carefully and identify that all the parts are present.

The camera is suitable for indoor use. Please bear in mind the following points when choosing a mounting position.

- The camera must be positioned so that it will not point directly into the sun (sunrise and sunset) or any bright light, as this may cause damage to the camera.
- Avoid viewing areas where half the area is in bright sunlight and the other half is dark, such as in the shadow of a building. All types of cameras have difficulty in 'seeing' with such a large lux level variation.
- Do not open the camera housing. This will void the warranty and break the warranty seal inside the camera.
- Do not cut the camera cables, this will void the warranty.
- Make sure you use only the recommended power supply. Damage caused to the camera by incorrect voltage or wiring is not covered by the warranty.

Model:
VIS125C
Colour Internal Mini
Camera and 20 metre Cable

Mounting Options




Wall
Mount




Ceiling
Mount

Package Contents

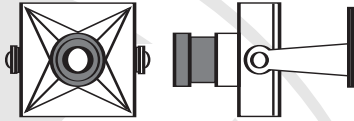


VIS125 Camera



20 metre cable
(pre-connected)

Wiring

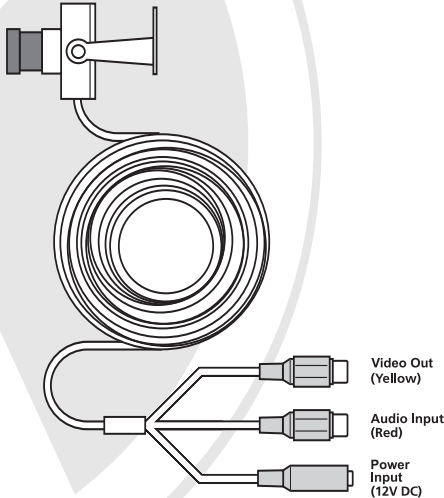

1. Connect power to the black power jack.
2. Connect video feed to the yellow phono type connector and audio to the red phono type connector.
3. Test that the camera is functioning fully before finalising the position of the camera.

Specification

Model:	VIS125C
Camera optimised for:	Internal use
Resolution:	350TVL
Image Sensor:	1/3" Digital CMOS
Minimum Illumination:	2.0 Lux
Lens Angle	43°
TV System:	PAL
Video Signal Output	Phono Socket
Video Output	1.0V p-p @75 OhmsΩ
Audio	Yes
AGC	Auto
White Balance	Auto
Nightvision	No
Operating Voltage	12V DC
Power Consumption	110mA
Weatherproofing	No
Dimensions	30x30x10mm (WxHxD)