


Installing the XAM401


Installing the updated model of the XAM401 system

If you have received the updated model of the XAM401 system the wiring diagram in the manual supplied is now slightly different. Please see the information below for the new wiring.

You can identify the new model as it has a Menu button in the bottom left corner of the unit as shown below.

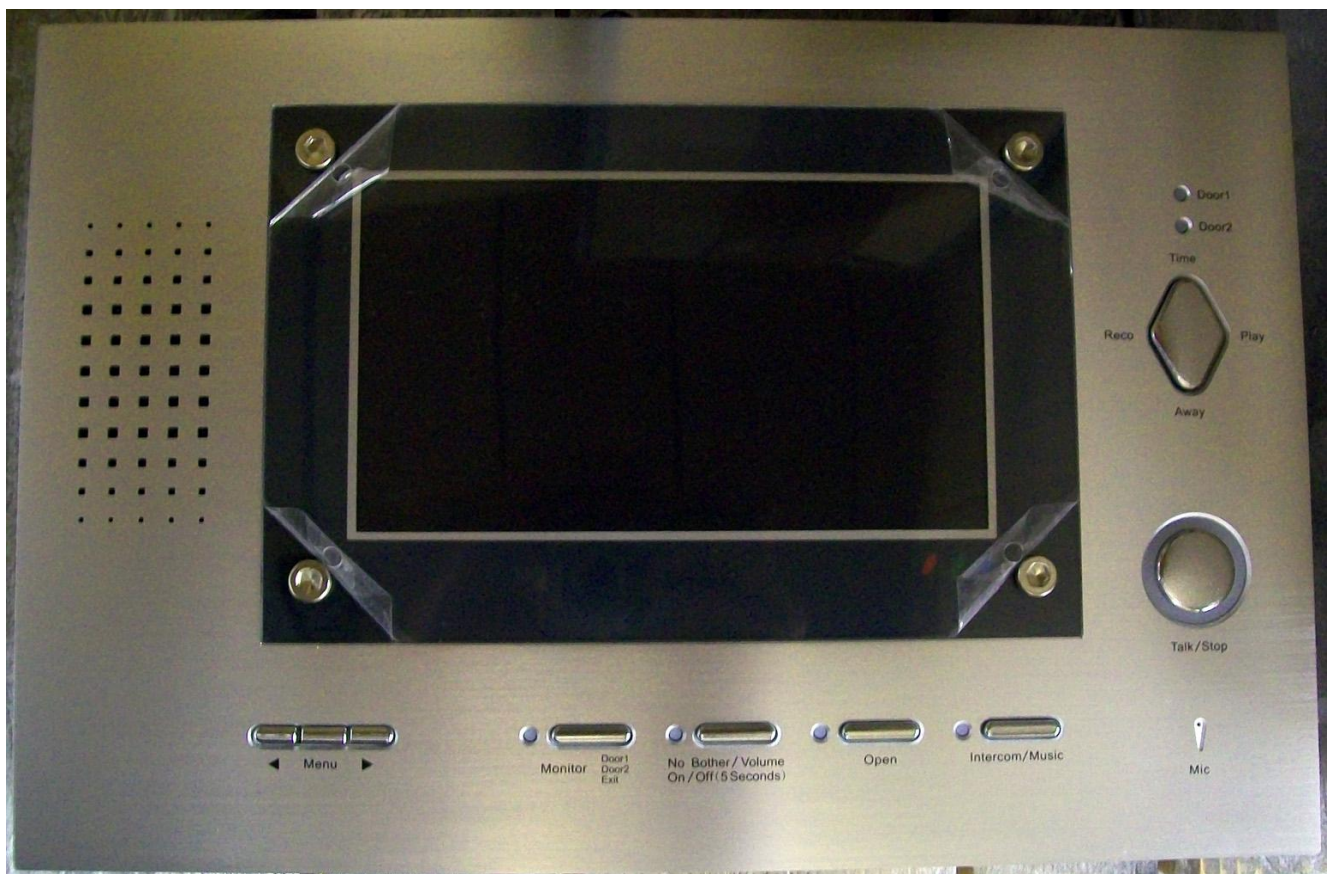

In the previous model you needed to connect the connecting cables from your entry camera to the first 4 ports, in this model you now need to connect to ports 3, 4, 5 and 6. Please see below for the updated wiring.

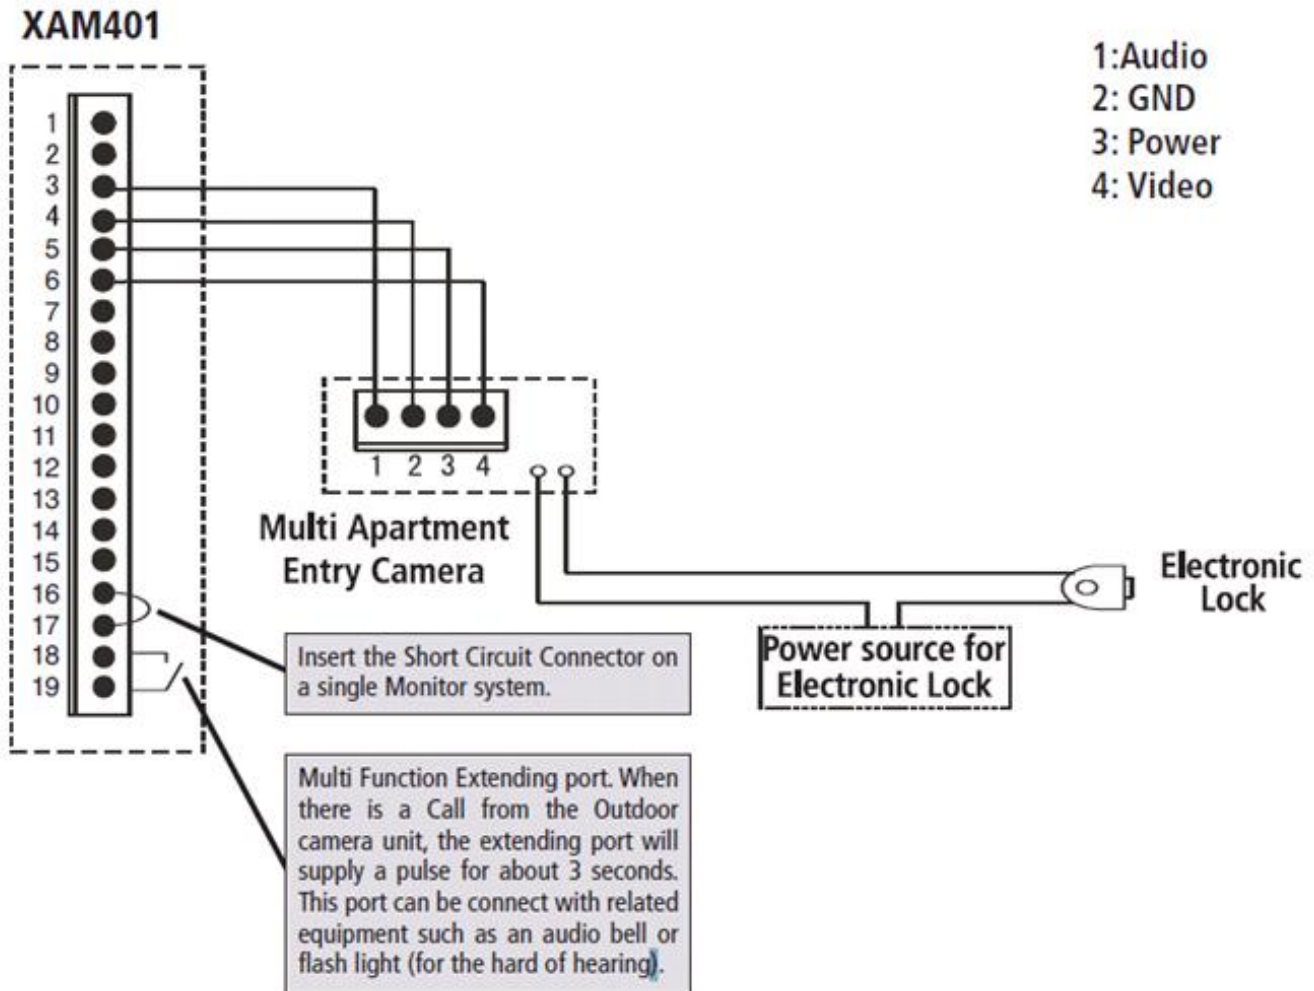

The full port list is as follows:

- Port 1 – external DC power positive
- Port 2 – external DC power negative
- Port 3 – outdoor unit 1 audio “AF” terminal
- Port 4 - outdoor unit 1 “GND” terminal
- Port 5 - outdoor unit 1 power “VCC” terminal
- Port 6 – outdoor unit 1 video “VD” terminal
- Port 7 – outdoor unit 2 audio “AF” terminal
- Port 8 – outdoor unit 2 “GND” terminal
- Port 9 – outdoor unit 2 power “VCC” terminal
- Port 10 – outdoor unit 2 video “VD” terminal
- Port 11 – extension unit audio “AF” terminal
- Port 12 – extension unit “GND” terminal
- Port 13 – extension unit data “DAT” terminal
- Port 14 – extension unit video “VD” terminal
- Port 15 & 16 – Video “VD” impedance matching terminal
- Port 17 & 18 – auxiliary functions

If you have any further queries or require assistance, please call our technical support line on 0871 222 1430