

Specifications

Model:	EVC100D
Picture Type:	Colour
Image Sensor:	Omnivision 1/3" CMOS
Resolution:	350 TVL
Lens Viewing Angle:	43°
Infra Red Nightvision:	No
Minimum Illumination:	2.0 Lux
Audio:	Yes
Operating Voltage:	12V DC 60mA Regulated
Suggested Power Supply:	12V DC 300mA Regulated
Mounting:	Ceiling
Weatherproofing:	No
Dimensions (ØxH):	87x60mm

TECHNICAL SUPPORT:

For Technical Support please contact your local distributor.

LIMITED WARRANTY:

This product is supplied with a limited 1 Year warranty. The Warranty excludes products that have been misused, (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.

EXTRA value

CCTV




Before you begin


- Please unpack the box carefully and identify that all the parts are present.
- Make sure you use only the recommended power supply. Damage caused to the camera by incorrect voltage or wiring is not covered by the warranty.

EVC100D
Colour Dome Camera

Package Contents



EVC100D Camera




Fixing Screws &
Wall Plugs

Main Features

- Good Resolution CMOS sensor provides great quality colour images in light levels of 2.0 lux and above
- Discreet styling for unobtrusive low profile use
- Tamper resistant and easy to clean, as all moving parts are behind the dome cover
- Omnivision 1/3" CMOS image sensor for 350 TVL resolution images and 2.0 lux low light sensitivity
- 6.0mm focus free lens for 43° viewing angle
- Integrated microphone for audio
- Designed for internal use and ceiling mounting

Wiring Connections

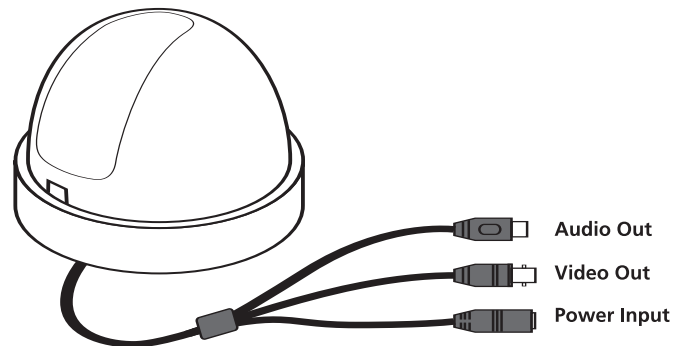

1. Connect power to the DC Socket.
2. Connect video feed to the BNC Socket.
3. Connect audio to the Phono Socket
4. Test that the camera is functioning fully before finalising the position of the camera.