

TECHNICAL SUPPORT:

For Technical Support for any Xvision product please contact your local distributor.

LIMITED WARRANTY:

This product is supplied with a 2 Year warranty. The Warranty excludes products that have been misused, (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.



Manufactured exclusively for:

Xvision (Europe) Group,

Head Office: London, U.K.

Email: info@x-vision.co.uk

Web: www.x-vision.co.uk



Model: KCB401C
Mini Covert Camera with Pinhole
Cone Lens & Integrated Audio

Before you begin

- Please unpack the box carefully and identify that all the parts are present.

The camera is suitable for indoor use only. Please bear in mind the following points when choosing a mounting position.

- The camera must be positioned so that it will not point directly into the sun (sunrise and sunset) or any bright light, as this may cause damage to the camera.
- Avoid viewing areas where half the area is in bright sunlight and the other half is dark, such as in the shadow of a building. All types of cameras have difficulty in 'seeing' with such a large lux level variation.
- Do not open the camera housing. This will void the warranty and break the warranty seal inside the camera.
- Do not cut the camera cables, this will void the warranty.
- Make sure you use only the recommended power supply. Damage caused to the camera by incorrect voltage or wiring is not covered by the warranty.

Model:
KCB401C
Colour Internal Mini Covert
Camera with Audio


Mounting Options

Wall
Mount




Ceiling
Mount

Package Contents

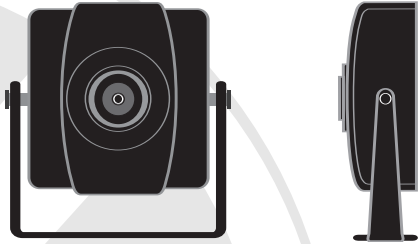

KCB401C Camera with bracket

Wiring



1. Connect power to the DC Socket.
2. Connect video feed to the BNC Socket.
3. Connect audio feed to the Phono Socket.
4. Test that the camera is functioning fully before finalising the position of the camera.

Specification

Model:	KCB401C
Picture Type:	Colour
Image Sensor:	Sony 1/4" Super HAD CCD
DSP:	Xvision IXC1
Resolution:	420 TVL
Lens Viewing Angle:	60°
Infra Red Nightvision:	No
Minimum Illumination:	0.5 Lux
Audio:	Yes
Operating Voltage:	12V DC 120mA
Suggested Power Supply:	12V DC 300mA Regulated
Mounting:	Wall/Ceiling
Weatherproofing	No
Dimensions (WxHxD)	36x36x24mm